


HC41X Energy-saving muffler check valve

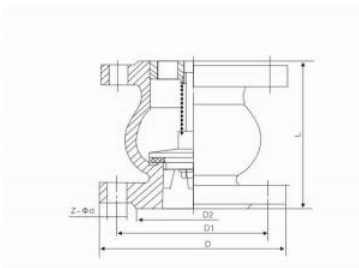

выбирать			1,0 МПа					1,6 МПа				
Расстояние	Ду(мм)		л	Д	Д1	Д2	z-φd	Ду(мм)	л	Д	Д1	Д2 z-φd
40	112	145	110	18	4-18	40	112	145	110	18	4-18	
50	120	160	125	20	4-18	50	120	160	125	20	4-18	
65	130	180	145	20	4-18	65	130	180	145	20	4-18	
80	150	195	160	22	8-18	80	150	195	160	22	8-18	
100	165	215	180	24	8-18	100	165	215	180	24	8-18	
125	190	245	210	26	8-18	125	190	245	210	26	8-18	
150	210	280	240	26	8-22	150	210	280	240	26	8-22	
200	255	335	295	28	8-22	200	255	335	295	30	12-22	
250	310	390	350	28	12-22	250	310	405	355	32	12-26	
300	320	440	400	28	12-22	300	320	460	410	32	12-26	
350	380	500	460	30	16-22	350	380	520	470	36	16-26	
400	405	565	515	32	16-26	400	405	580	525	38	16-30	
450	430	615	565	32	20-26	450	430	640	585	40	20-30	
500	450	670	620	34	20-26	500	450	715	650	42	20-33	
600	510	780	725	36	20-30	600	510	840	770	48	20-36	