


# Pneumatic O cut off ball valve

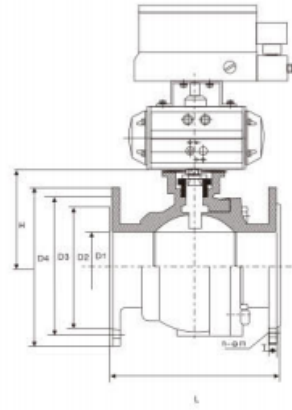

выбирать	Расстояние	ДМ	1,6 МПа							2,5 МПа							150 фунтов						
			л	Д	Д1	Д2	б	ж	п- φd	л	Д	Д1	Д2	б	ж	п- φd	ж	п- φd	л	Д	Д1	Д2 б	
15	130	95	65	14	14	2	4-14	130	95	65	16	16	2	4-14	108	89	60.50	35	12	2	4-15		
20	140	105	75	14	14	2	4-14	140	105	75	16	16	2	4-14	117	98	70	43	12	2	4-15		
25	150	115	85	4	14	2	4-14	150	115	85	16	16	2	4-14	127	108	79.50	51	12	2	4-15		
32	165	135	100	16	16	2	4-18	165	135	100	18	18	2	4-18	140	117	89	63	12	2	4-15		
40	180	145	110	16	16	3	4-18	180	145	110	18	18	3	4-18	165	127	98.50	73	15	2	4-15		
50	200	160	125	16	16	3	4-18	200	160	125	20	20	3	4-18	178	152	120.50	92	16	2	4-19		
65	200	180	145	18	18	3	4-18	200	180	145	22	22	3	8-18	190	178	139.50	105	18	2	4-19		
80	250	195	160	20	20	3	8-18	250	195	160	22	22	3	8-18	203	190	152.50	127	19	2	4-19		
100	280	215	180	20	20	3	8-18	280	230	190	24	24	3	8-23	229	229	190.50	157	24	2	8-19		
125	320	245	210	22	22	3	8-18	320	270	220	28	28	3	8-25	356	254	216	186	24	2	8-22		
150	360	280	240	24	24	3	8-23	360	300	250	30	30	3	8-25	394	279	241.50	216	26	2	8-22		
200	400	335	295	26	26	3	12-23	400	360	310	34	34	3	12-25	457	343	298.50	270	29	2	8-22		